

Hvrfingerprint

Contents

- [Name](#)
- [Synopsis](#)
- [Description](#)

Name

hvfingerprint - Display host fingerprint

Synopsis

hvfingerprint


Description

Command **hvfingerprint** causes HVR to calculate and display the hardware fingerprint of the current host it is running on. A host fingerprint is an upper case letter followed by 6 decimal digits, such as **P233198**. This command should be used on the hub host to learn its fingerprint.

```
C:\hvr>hvfingerprint
P233198

C:\hvr>
```

Host fingerprint of the hub host is also displayed in [hvr gui](#).

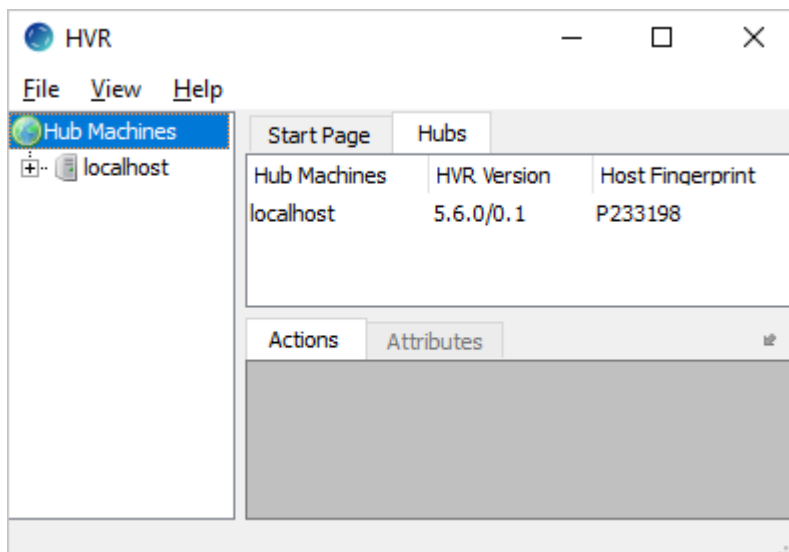

Hardware fingerprint of an Amazon EC2 virtual machine will be reported with an 'A' letter, such as **A654321**. Only EC2 instance ID is used in this case for fingerprinting. The fingerprint stays the same even if EC2 virtual machine migrates to a different hardware.